51CM CONCEALED RANGEHOOD



MODEL AUM51X





PRODUCT INFORMATION

FINISH

• AS430 fingerprint-proof stainless steel

FEATURES

- concealed undermount design
- slider controls
- 45.5 dBA (minimum speed)
- 57 dBA (maximum speed)
- 2 x extraction levels
- 2 x 28W halogen lights
- installation with outlet tube to the exterior/ recirculating
- easy installation system

FILTERS

• aluminium grease filter

MOTOR

- 645m³/hr airflow at maximum speed
- duct outlet Ø120mm

OPTIONAL EXTRA

• Charcoal filter: 2825263

EAN 9347777001245

AR10112021

MARTUSI

NOW WITH

SIMPLY REGISTER YOUR ARTUSI APPLIANCE ARTUSI.COM.AU

DISCLAIMER

Eurolinx PTY LTD, is continually seeking ways to improve the design specifications, aesthetics and production techniques of its products. As a result alterations to our products and designs take place continually. Whilst every effort is made to produce information and literature that is up to date, this brochure should not be regarded as an infallible guide to the current specifications, nor does it constitute an offer for the sale of any particular product. Product dimensions indicated in our literature is indicative only. Actual product only should be used to define dimension cut outs. Distributors, and retailers are not agents of Eurolinx and are not authorized to bind Eurolinx by any express or implied undertaking or representation.


FOLLOW US ON:	O instagram.com/artusi_appliances	www.linkedin.com/company/eurolinx-pty-ltd-t-a-ilv	re/		
Australia National Telephone Number 1300 (694 583) New Zealand Telephone Number 64 3 344 5913 artusi.com.au Artusi showroom hours: Tuesday to Friday - 9am-5pm, Saturday - 10am-4pm, Sunday and Monday - closed * * Melbourne showroom hours: Tuesday to Saturday - 10am-4pm					
NSW & ACT (Head Office)	QLD	WA & NT	New Zealand		
48-50 Moore Street	1/42 Cavendish Road	Unit 10/55 Howe Street	PO Box 11.160		
Leichhardt	Coorparoo	Osborne Park	Sockburn Christchurch		
F 02 8569 4699	F 07 3397 0850	F 08 9201 9188	F 03 344 5906		

51CM CONCEALED RANGEHOOD



MODEL AUM51X

TECHNICAL DIAGRAM

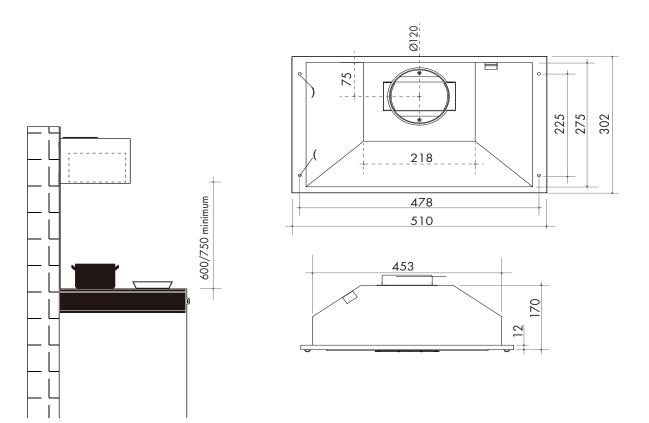

INSTALLATION: 600mm minimum height above electric cooktop 600mm minimum height above gas cooktop

NB: drawings are not to scale — they are to be used for detailed installation instructions, please refer to user guide.

EAN 9347777001245

AR10112021

DISCLAIMER

AUM51X 51cm concealed undermount rangehood 10 AMP electrical connection, 3-pin plug and cord 100W maximum power consumption

Eurolinx PTY LTD, is continually seeking ways to improve the design specifications, aesthetics and production techniques of its products. As a result alterations to our products and designs take place continually. Whilst every effort is made to produce information and literature that is up to date, this brochure should not be regarded as an infallible guide to the current specifications, nor does it constitute an offer for the sale of any particular product. Product dimensions indicated in our literature is indicative only. Actual product only should be used to define dimension cut outs. Distributors, and retailers are not agents of Eurolinx and are not authorized to bind Eurolinx by any express or implied undertaking or representation.

FOLLOW US ON: O	nstagram.com/artusi_appliances	www.linkedin.com/company/eurolinx-pty-ltd-t-a-	ilve/		
Australia National Telephone Number 1300 (694 583) New Zealand Telephone Number 64 3 344 5913 artusi.com.au Artusi showroom hours: Tuesday to Friday - 9am-5pm, Saturday - 10am-4pm, Sunday and Monday - closed * * Melbourne showroom hours: Tuesday to Saturday - 10am-4pm					
NSW & ACT (Head Office) 48-50 Moore Street Leichhardt F 02 8569 4699	QLD 1/42 Cavendish Road Coorparoo F 07 3397 0850	WA & NT Unit 10/55 Howe Street Osborne Park F 08 9201 9188	New Zealand PO Box 11.160 Sockburn Christchurch F 03 344 5906		